JAWOR-PARKIET.PL®

WOODEN FLOORING MANUFACTURER

Care guide

of Jawor-Parkiet wooden floors

3 steps to longevity

A wooden floor is every interior's decoration - it adds class, elegance and provides it with individuality. How to ensure its longevity? Based on many years of experience, Jawor-Parkiet has developed a simple and economical three steps' method of floor care, which guarantees that wooden boards and parquet will serve us for years.






www.jawor-parkiet.pl /yt

Do you want to learn more about the care of wooden floors?

Visit our channel on YouTube and learn more From Board to

Board guide.

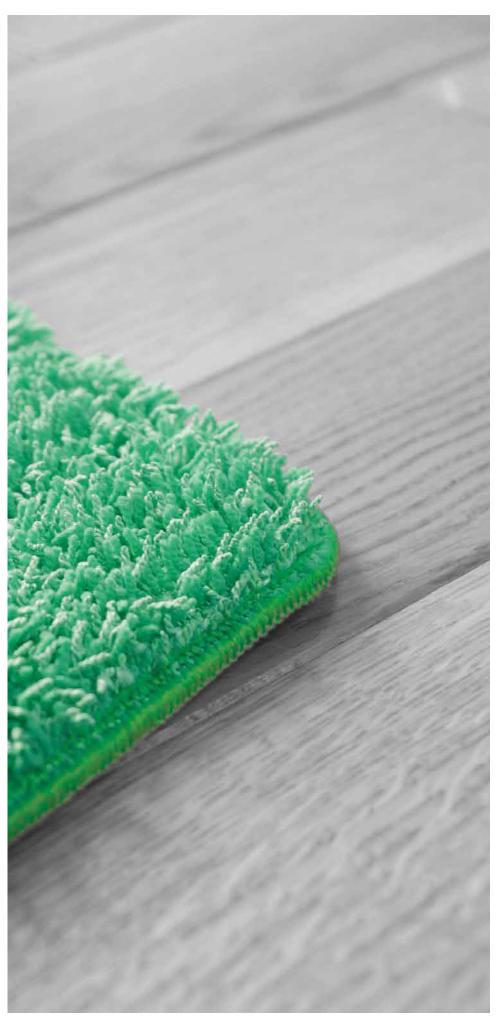

STEP 1:

Make the right choice

In order to be able to enjoy the natural qualities of wooden floors for many years, you must not forget to protect their surfaces from damage caused by everyday use. This decision, which you make at the purchase stage, is crucial for the continued use of boards or parquets. Jawor-Parkiet products are factory-protected in two ways - by eight layers of UV lacquer or three layers of natural oil-wax, a mixture of liquid oils and liquid wax. Both methods provide complete protection and make the products exceptionally durable.

STEP 2:

Maintain it every day

Regardless of the preservation methods used, in order to avoid the damages on the surface it is necessary to maintain for the floor during everyday use. To do this, you need to follow some basic rules. Do you know which ones?

- Use soft footwear and secure furniture with special felt coasters.
- Avoid contamination that can scratch a wooden surface, such as sand
- Remove any dirt using a soft brush and a soft-tip vacuum-cleaner
- Try to avoid excessive mechanical loads on the floor.
- Make sure the air humidity in the room stays between 45-60%.
- · Wipe the floor dry or with a slightly dampened cloth
- Vacuum the floor with a nozzle for parquet, panels and hard surfaces.
- Remember to remove any dirt (and spills liquids first) as soon as you notice it.

Did you know that...

To enjoy the beauty of the wooden floor, you must immediately remove the dirt, using soft brushes, delicately wiped cloth or spray mop and professional care products - a concentrate for lacquered or oil-waxed Jawor-Parkiet floors?

STEP 3:

Trust the professionals

Lacquered and oil-waxed floors

Regular cleaning and maintenance are the only way to make your wooden floors look beautiful and fresh. With a view to those who want to take care of their natural qualities and ensure their longevity, a line of professional care products for Jawor-Parkiet wooden has been created.

Floors for years

How to take care of Jawor-Parkiet floors?

Lacquered floor – covered with eight layers of UV-cured acrylic lacquer.

- After the floor installation, it should be preserved with Impregnate for Jawor-Parkiet lacquered floors. Its aim it to protect the edges and gaps from moisture. This is done by the parquet work crew (at an additional cost) and it is the last stage of the work
- For the on-going protection, use Jawor-Parkiet concentrate for cleaning of lacquered floors.

Oil-waxed floor - covered with three layers of oil-wax.

- · After placing the floor it is advisable to protect it with Impregnant (care oil) for oil-waxed floors of Jawor-Parkiet series. Its aim it to protect the edges and gaps from moisture. This is done by the parquet work crew (at an additional cost) and it is the last stage of the work.
- As much as possible, the floor should be "dried" with a microfiber mop. For an on-going "wet" protective care Jawor-Parkiet concentrate for cleaning of oil-waxed floors or other should be used, as indicated by Jawor-Parkiet.
- The natural feature of oil-wax floors is the formation of routes, wiping of oil-wax and washing off of hard wax coating. That is why, approximately after 20 washings the surface should be impregnated with care oil a product for oil-waxed floors of Jawor-Parkiet series or other, indicated by Jawor-Parkiet.

Maintain constant air humidity

Wood, due to its mechanical and physical properties, changes its dimensions and shapes as the temperature and relative humidity change. Thus, it is vital to keep the humidity in the room at 45-60 percent. The rooms where the floor will be used should be equipped with a room thermometer, humidity meter and humidifier. These interiors need to be ventilated in the spring and summer, and air humidifiers should be used during the heating period.

For more information visit www.en.jawor-parkiet.pl.

Oil-wax

renovation on your own

Infiltrates into the structure of wood, Covers the surface of the element, protect protects against moisture, dirt, dust and against moisture, dirt, dust and stains stains Protects the surface of a floor Infiltrates into wood pores Protects against mechanical damages, Protects against mechanical damages, scratches and wear resulting from everyscratches and wear resulting from everyday Requires periodical impregnation and Requires ongoing maintenance ongoing maintenance Does not allow for punctual repairs, damaged Allows for doing punctual renovations element must be replaced There is a possible to do a punctual Destroyed lacquer must be completely















Lacquer

grinded down (sanded) and lacquered again